

MPM-05SV Series

85 to 305 VAC Input, 5W Miniature PC Mount AC/DC Power Supplies



Key Features:

- 5W Output Power
- Universal 85-305 VAC Input
- EN 60950 Approved
- Six Single Output Models
- Meets EN 55022 B
- >300 kHour MTBF
- Compact PC Mount Case



MicroPower Direct

292 Page Street
Suite D
Stoughton, MA 02072
USA

T: (781) 344-8226
F: (781) 344-8481
E: sales@micropowerelectronics.com
W: www.micropowerelectronics.com



Electrical Specifications

Specifications typical @ +25°C, 230 VAC input voltage & rated output current, unless otherwise noted. Specifications subject to change without notice.

Input

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Voltage Range		85		305	VAC
		100		430	VDC
Input Frequency		47		63	Hz
Input Current	See Model Selection Guide				
Inrush Current	115 VAC		10.0		A Pk
	230 VAC		15.0		
Leakage Current	230 VAC/50 Hz		0.3		mA rms

Output

Parameter	Conditions	Min.	Typ.	Max.	Units
Output Voltage	See Model Selection Guide				
Output Current	See Model Selection Guide				
Minimum Load		0			%
Output Voltage Accuracy			±2.0		%
Line Regulation	V _{IN} = Min to Max		±0.5		%
Load Regulation	See Note 2		±1.0		%
Ripple & Noise (20 MHz)	See Note 3		50	100	mV Pk - Pk
Hold-Up Time	115 VAC		15		mSec
	230 VAC		80		
Temperature Coefficient			±0.02		%/°C
Short Circuit Protection	Continuous (Autorecovery)				
Overload Protection	Autorecovery		110		%

General

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation Voltage	Input to Output, 60S	3,000			VAC
	Input to FG, 60S	2,000			
Switching Frequency			65	132	kHz

Environmental

Parameter	Conditions	Min.	Typ.	Max.	Units
Operating Temperature Range	Ambient	-40	+25	+70	°C
Storage Temperature Range		-40		+105	°C
Cooling	Free Air Convection (See Derating Curve)				
Humidity	RH, Non-condensing			95	%

Physical

Case Size	See Mechanical Diagram On Page 4				
Case Material	Non-Conductive Black Plastic (UL94-V0)				
Weight	2.64 Oz (75g)				

Reliability Specifications

Parameter	Conditions	Min.	Typ.	Max.	Units
MTBF	MIL HDBK 217F, 25°C, Gnd Benign	300			kHours
Lead Temperature, See Note 4	Wave Solder			260	°C
	Hand Solder			360	
Safety Standards	UL 60950, EN 60950				
Safety Class	Class I				

www.micropowerelectronics.com

Model Number	Input		Output			Over Volt. Protection (VDC)	Capacitive Load (μ F, Max)	Efficiency (% Typ)
	Current (A)		Voltage (VDC)	Current (A Max.)	Power (W)			
	115 VAC	230 VAC						
MPM-05SV-03	0.125	0.080	3.3	1.25	4.0	7.5	4,000	72
MPM-05SV-05	0.125	0.080	5.0	1.00	5.0	7.5	4,000	77
MPM-05SV-09	0.125	0.080	9.0	0.55	5.0	12.0	1,800	79
MPM-05SV-12	0.125	0.080	12.0	0.42	5.0	20.0	1,800	81
MPM-05SV-15	0.125	0.080	15.0	0.33	5.0	20.0	1,500	82
MPM-05SV-24	0.125	0.080	24.0	0.23	5.0	30.0	330	84

Notes:

1. Operation at no load will not damage the units, however, they may not meet all specifications.
2. Load regulation is measured for an output change of 10% to 100% at nominal input line.
3. When measuring output ripple, it is recommended that an external 0.1 μ F high frequency ceramic capacitor be placed in parallel with a 47 μ F high frequency electrolytic capacitor from the +V_{OUT} pin to the -V_{OUT} pin.
4. The max lead temp for wave soldering is \pm 5% for a time period of 5 to 10S. For hand soldering, it is \pm 10% for 3 to 5S.

5. All units are rated for EN 55022 (CE/RE) class B without external components.
6. All units are rated for EN 61000-4-4 (\pm 2 kV) with the addition of the MOV shown in the typical connection below. They will meet EN 61000-4-4 (\pm 4 kV) with the additional input components shown in the typical connection diagram shown on page 3.
7. All units are rated for EN 61000-4-5 (\pm 1 kV/ \pm 2 kV) with the addition of the MOV shown in the typical connection below. They will meet EN 61000-4-5 (\pm 2 kV/ \pm 4 kV) with the input components shown in the typical connection diagram on page 3.
8. It is recommended that a fuse be used on the input of a power supply for protection. For the **MPM-05SV-xx** series, a 1.0A/300 VAC slow blow should be used.

MPD offers a wide variety of input protection and filtering modules for use with our AC & DC power modules. The **MACFM-02A** may be used with the **MPM-05SV**, as shown on page. Full data-sheets for all our input modules are available on our website, or call the factory for a more help.

Typical Connection




The diagram above illustrates a typical application connection of the **MPM-05SV** series. Notes on this circuit (starting with the input circuit) are:


1. It is recommended that an external fuse and NTC be used. The recommended fuse is a 1.0A/300 VAC slow blow.
2. All units are rated for EN 55022 (CE/RE) class B without external components.
3. All units are rated for EN 61000-4-4 (\pm 2 kV) with the addition of the MOV shown in the typical connection above. They will meet EN 61000-4-4 (\pm 4 kV) with the additional input components shown in the typical connection diagram shown on page 3.
4. All units are rated for EN 61000-4-5 (\pm 1 kV/ \pm 2 kV) with the addition of the MOV shown in the typical connection above. They will meet EN 61000-4-5 (\pm 2 kV/ \pm 4 kV) with the input components shown in the typical connection diagram on page 3.
5. If output noise levels lower than the specified limits are required, the addition of C₁ and C₂ should be sufficient for most applications. The output filtering capacitor C₂ is a high frequency, low resistance electrolytic capacitor. Capacitor C₁ is ceramic. Voltage derating of capacitors should be 80% or above.
6. The TVS is added to protect circuits being powered from damage if the module fails.

Model	C ₁	C ₂	TVS
MPM-05SV-03	1.0 μ F/50V	330 μ F/10V	SMBJ7.0A
MPM-05SV-05	1.0 μ F/50V	330 μ F/10V	SMBJ7.0A
MPM-05SV-09	1.0 μ F/50V	120 μ F/25V	SMBJ12A
MPM-05SV-12	1.0 μ F/50V	120 μ F/25V	SMBJ20A
MPM-05SV-15	1.0 μ F/50V	68 μ F/25V	SMBJ20A
MPM-05SV-24	1.0 μ F/50V	68 μ F/35V	SMBJ30A

Derating Curve

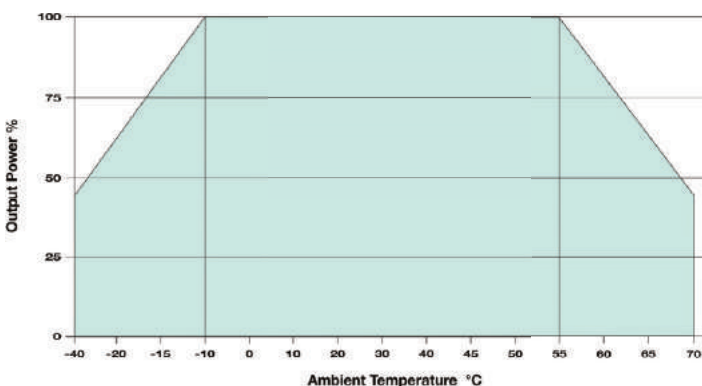

Input Voltage Vs Load

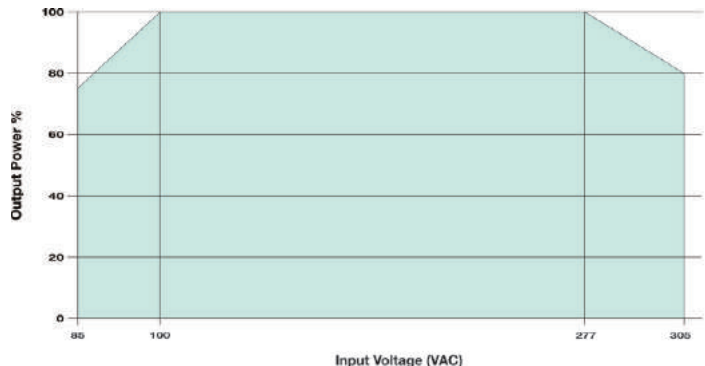


Parameter	Conditions	Criteria	Level
Radiated Emissions	EN 55022		Class B
Conducted Emissions	EN 55022		Class B
ESD	EN 61000-4-2	B	±8 kV Air ±6 kV Contact
RS	EN 61000-4-3	A	10V/m
EFT	EN 61000-4-4	B	±2 kV
	See Note 1	B	±4 kV
Surge	EN 61000-4-5	B	±1 kV/±2 kV
	See Note 2	B	±2 kV/±4 kV
CS	EN 61000-4-6	A	10V rms
PFM	EN 61000-4-8	A	10A/m
Voltage Dips, Short, Interruptions	EN 61000-4-11	B	0% - 70%

Notes:

- To meet the requirements of EN 61000-4-4 (±4 kV), external components are needed. This can be done discretely (as shown below), or with the addition of the **MACFM-02A**. Contact the factory for more information.
- To meet the requirements of EN 61000-4-5 (±2 kV/ ±4 kV), external components are needed. This can be done discretely (as shown below), or with the addition of the **MACFM-02A**. Contact the factory for more information.

Typical Connection: With Input Protection/Filtering Components

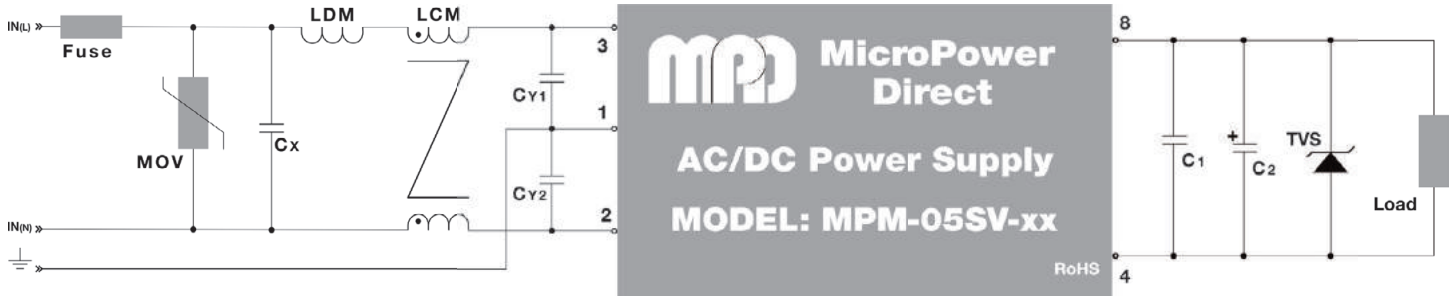

The diagram above illustrates a typical connection of the **MPM-05SV** series. The input components are required to meet the more stringent EFT/Surge levels of EN 61000-4 (see notes for EMC Characteristics table above). Some notes on these components are:


- It is recommended that an external fuse be used. The recommended fuse size is a 1.0A/300 VAC slow blow.
- An external MOV is recommended on the input to protect the unit in the event of a surge. A recommended value is given in the table at right.
- The output filtering capacitors (C1 & C2) will reduce the output noise below specified levels. Recommended values are given in the table on page 2.
- The TVS is added to protect circuits being powered from damage if the module fails. A recommended value for each model is given in the table on page 2.

5. Suggested component values are:


Component	MPM05SV-03	MPM05SV-05	MPM05SV-09	MPM05SV-12	MPM05SV-15	MPM05SV-24
Fuse	1.0A/300 VAC	1.0A/300 VAC	1.0A/300 VAC	1.0A/300 VAC	1.0A/300 VAC	1.0A/300 VAC
MOV	S14K350	S14K350	S14K350	S14K350	S14K350	S14K350
Cx	0.1 µF/310V	0.1 µF/310V	0.1 µF/310V	0.1 µF/310V	0.1 µF/310V	0.1 µF/310V
LDM	4.7 µH/2A	4.7 µH/2A	4.7 µH/2A	4.7 µH/2A	4.7 µH/2A	4.7 µH/2A
LCM	10 mH	10 mH	10 mH	10 mH	10 mH	10 mH
Cy1/Cy2	1,000 pF/400VAC	1,000 pF/400VAC	1,000 pF/400VAC	1,000 pF/400VAC	1,000 pF/400VAC	1,000 pF/400VAC

- Input protection and filtering modules are available for a number of **MPD** AC/DC power supplies. For use with the **MPM-05SV** product series, the **MACFM-02A** filter module is recommended. A typical connection diagram and board layout with this module is shown in the figures below. For pricing or full technical information on the **MACFM-02A** (or any of our other modules) please contact the factory.

Typical Board Layout: With External Filter Module

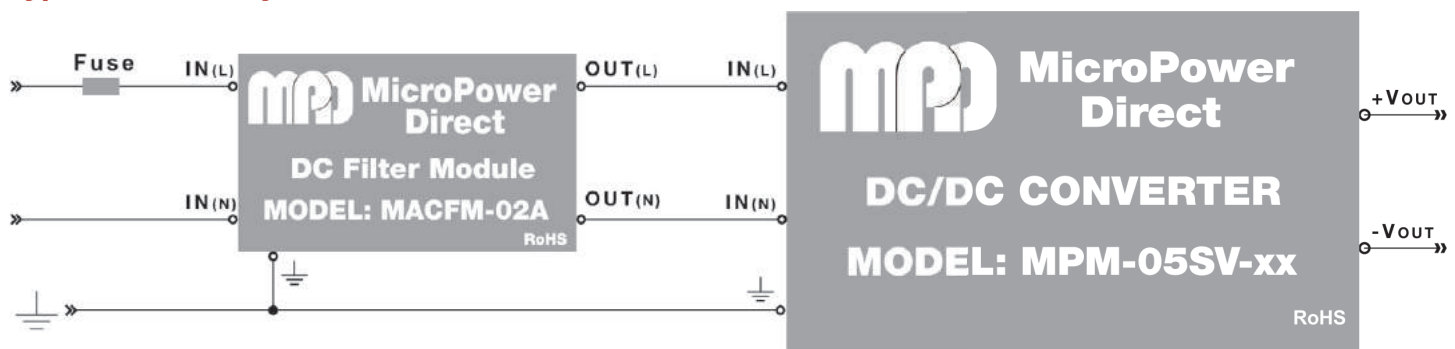


Typical Board Layout: With External Filter Module

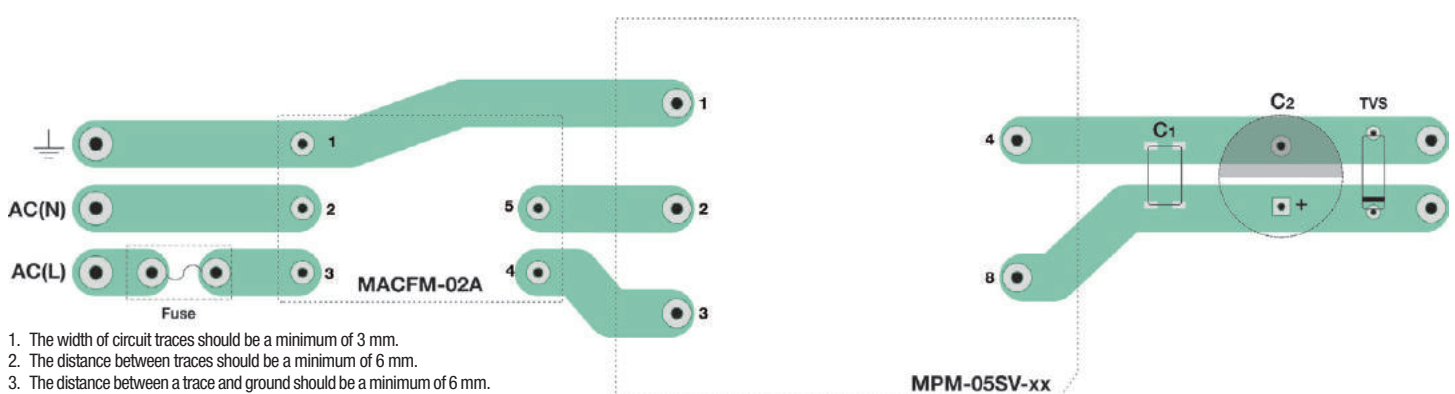

- The width of circuit traces should be a minimum of 3 mm.
- The distance between traces should be a minimum of 6 mm.
- The distance between a trace and ground should be a minimum of 6 mm.

Mechanical Dimensions

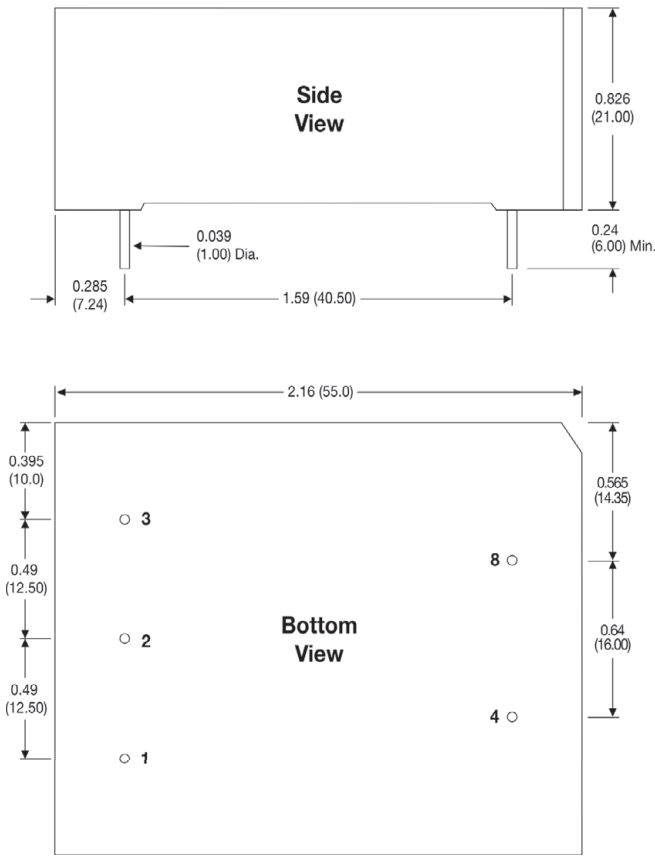

Pin Connections

Pin	Function
1	AC-Ground
2	AC-Neutral
3	AC-Line
4	-V _{OUT}
8	+V _{OUT}

Notes:

- All dimensions are typical in inches (mm)
- Tolerance x.xx = ±0.02 (±0.50)

Other Power Ranges

Series	Input	Output Voltage	Output Current	Module Dimensions
MPM-10SV	85 - 305 VAC	3.3 VDC	2.000A	2.16 x 1.77 x 0.83 (55.0 x 45.0 x 21.0)
		5.0 VDC	2.000A	
		9.0 VDC	1.100A	
		12.0 VDC	0.900A	
		15.0 VDC	0.700A	
		24.0 VDC	0.450A	
MPM-15SV	85 - 305 VAC	3.3 VDC	3.000A	2.44 x 1.77 x 0.88 (62.0 x 45.0 x 22.5)
		5.0 VDC	2.800A	
		9.0 VDC	1.600A	
		12.0 VDC	1.250A	
		15.0 VDC	1.000A	
		24.0 VDC	0.625A	
MPM-20SV	85 - 305 VAC	3.3 VDC	3.500A	2.75 x 1.88 x 0.92 (70.0 x 48.0 x 23.5)
		5.0 VDC	3.500A	
		9.0 VDC	2.100A	
		12.0 VDC	1.600A	
		15.0 VDC	1.300A	
		24.0 VDC	0.850A	
MPM-25SV	85 - 305 VAC	3.3 VDC	4.100A	2.75 x 1.88 x 0.92 (70.0 x 48.0 x 23.5)
		5.0 VDC	4.100A	
		9.0 VDC	2.500A	
		12.0 VDC	2.100A	
		15.0 VDC	1.600A	
		24.0 VDC	1.100A	
		48.0 VDC	0.500A	

The **MPM-05SV** family is part of a series of products that range from 5W to 25W. The chart at left gives a summary of the other models in this series. Full data on all products is available on the **MPD** website. Contact the factory for more information.



MicroPower Direct
We Power Your Success - For Less!